


STANDARD DESIGN
TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR
HIGHWAY CONSTRUCTION, MAINTENANCE AND UTILITY OPERATIONS
CASE 8 - B

TWO-LANE, ONE-WAY - MOVING DAYTIME OPERATIONS ONLY

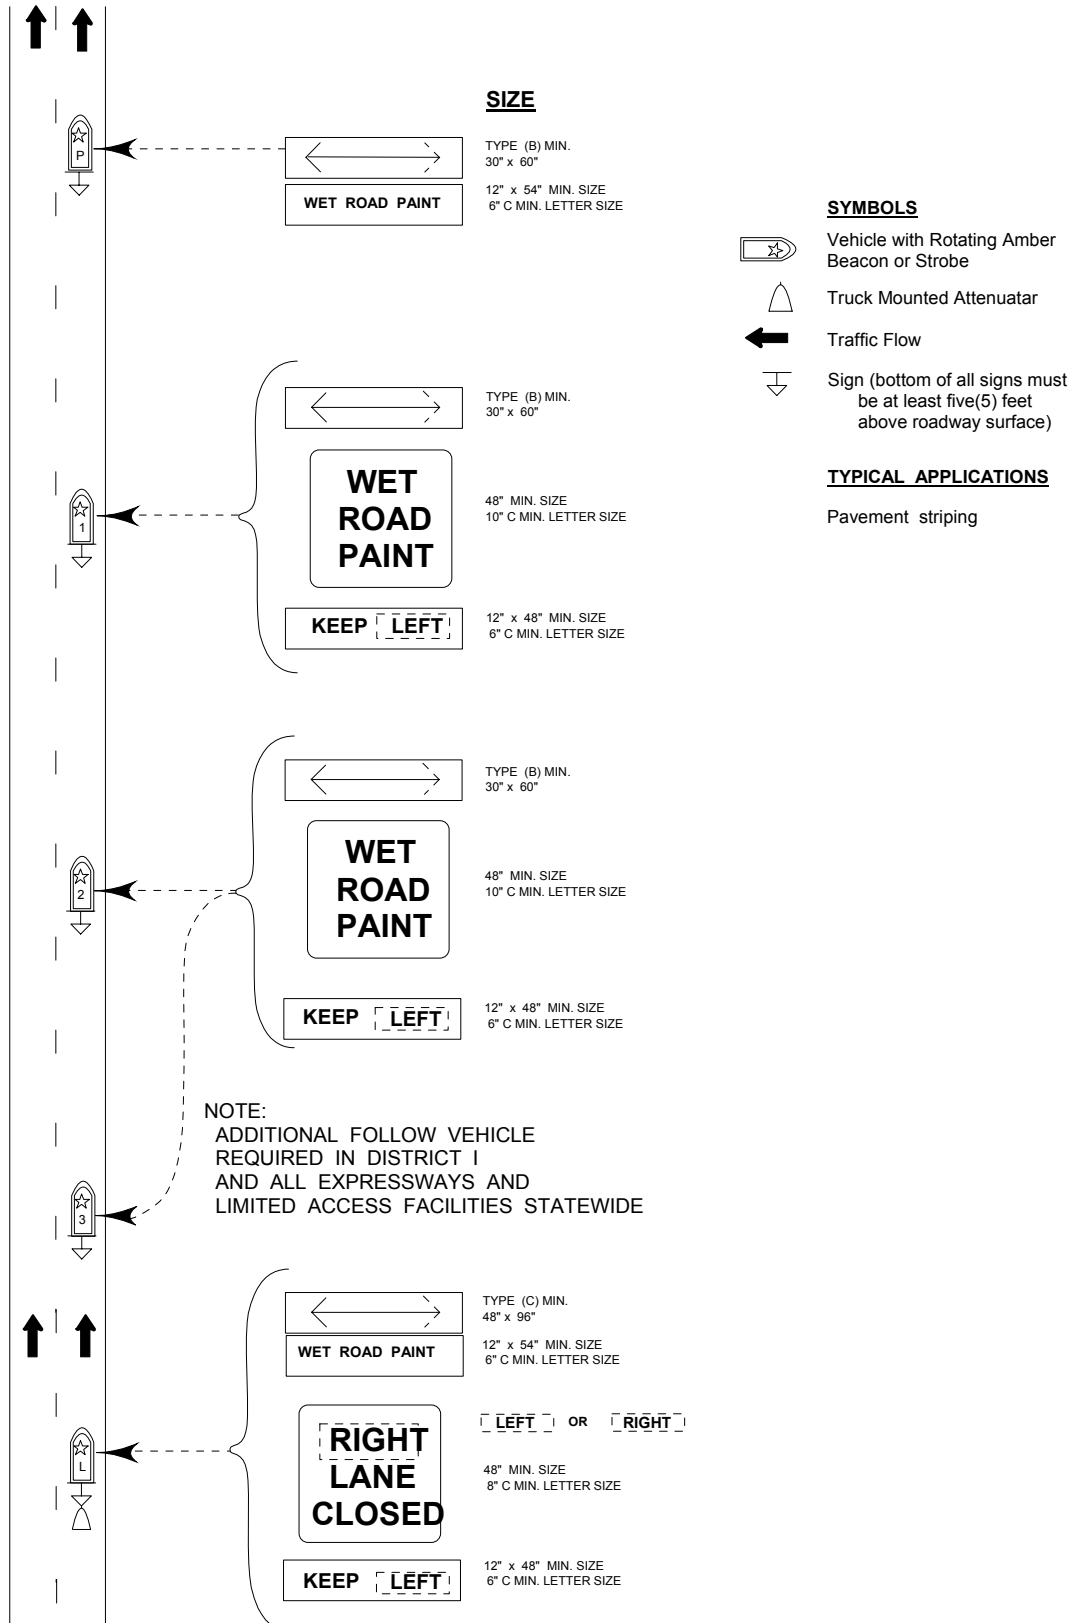

CASE 8-B

TWO LANE ONE WAY - MOVING DAYTIME OPERATIONS ONLY

Where, at any time, any vehicle, equipment, workers, or their activities require a moving operation where the average speed of movement is greater than four (4) miles per hour, but less than twenty-five (25) miles per hour.

General Notes

1. All vehicles, equipment, workers (except flagger) and their activities are restricted at all times to one side of the pavement, unless otherwise authorized by the Engineer.
2. A minimum of four (4) vehicles are required at all times during moving applications of pavement markings. (*See Standard Design Case 8-B*)
3. If work is being performed in the right lane, the first follow vehicle shall be driven in the right lane at a variable distance behind the Paint Machine to prevent other vehicles from entering behind the Paint Machine.
The second follow vehicle, the third follow vehicle when required and the last follow vehicle shall be driven at intervals of approximately seven hundred and fifty feet (750') behind the first follow vehicle.
The last follow vehicle shall be equipped with an impact attenuator (T.M.A.)
4. If work is being performed in the left lane the above operation would be identical, with the exception that it be performed on the left side of the highway.
5. Flags and flashing lights shall be mounted on the paint gun carriages whenever the carriage is extended 1 foot (1') or more beyond the width of the paint machine.
6. All signs must be fabricated of an approved reflective orange background with black copy and white (silver) stripes.
7. Longitudinal dimensions may be adjusted slightly to fit field conditions.
8. This is the minimum requirement for the condition set forth. The Traffic Engineer may require additional traffic control devices as deemed necessary.