



**4" x 8" RUNNING BOND PATTERN**

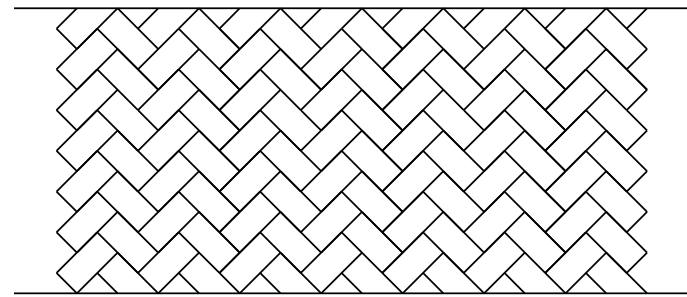

**4" x 8" HERRINGBONE PATTERN**

**NOTES:**

1. CONSTRUCT THE PATTERN SPECIFIED ON THE PLANS. COLOR IS TO BE "BRICK RED" UNLESS OTHERWISE NOTED ON THE PLANS.
2. MATERIALS AND PAVEMENT BOX VARY DEPENDING ON PLANS.
3. FOR CROSSWALK APPLICATIONS, REFER TO THE DE MUTCD CONTROL DEVICES FOR STRIPING WIDTH.
4. THE PATTERNS ABOVE ARE THE PREFERRED PATTERNS AVAILABLE FOR SIDEWALK OR CROSSWALK APPLICATIONS.

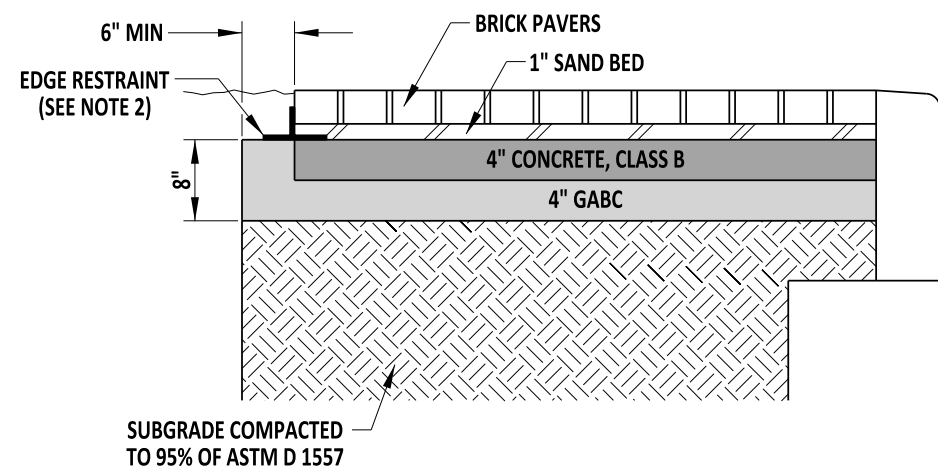

**BRICK PAVER SIDEWALK DETAIL**

**NOTES:**

1. WHEN SIDEWALK IS CONFINED BY A RIGID STRUCTURE ON BOTH SIDES, PLACE EXPANSION JOINT MATERIAL FROM TOP OF BRICK TO BOTTOM OF CONCRETE BASE ON AT LEAST ONE SIDE OF THE SIDEWALK.
2. EDGE RESTRAINT TO BE APPROVED BY THE ENGINEER IN THE FIELD AND INSTALLED AS PER MANUFACTURER'S RECOMMENDATIONS.



  
 ENGINEERING SUPPORT      DATE 09/01/2020  
**RECOMMENDED**

PATTERNED HOT-MIX OR CONCRETE & BRICK PAVER			
STANDARD NO.	M-6 (2020)	SHT.	1 OF 1

REVIEWED		DATE	09/01/2020
APPROVED		DATE	09/01/2020