


**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**

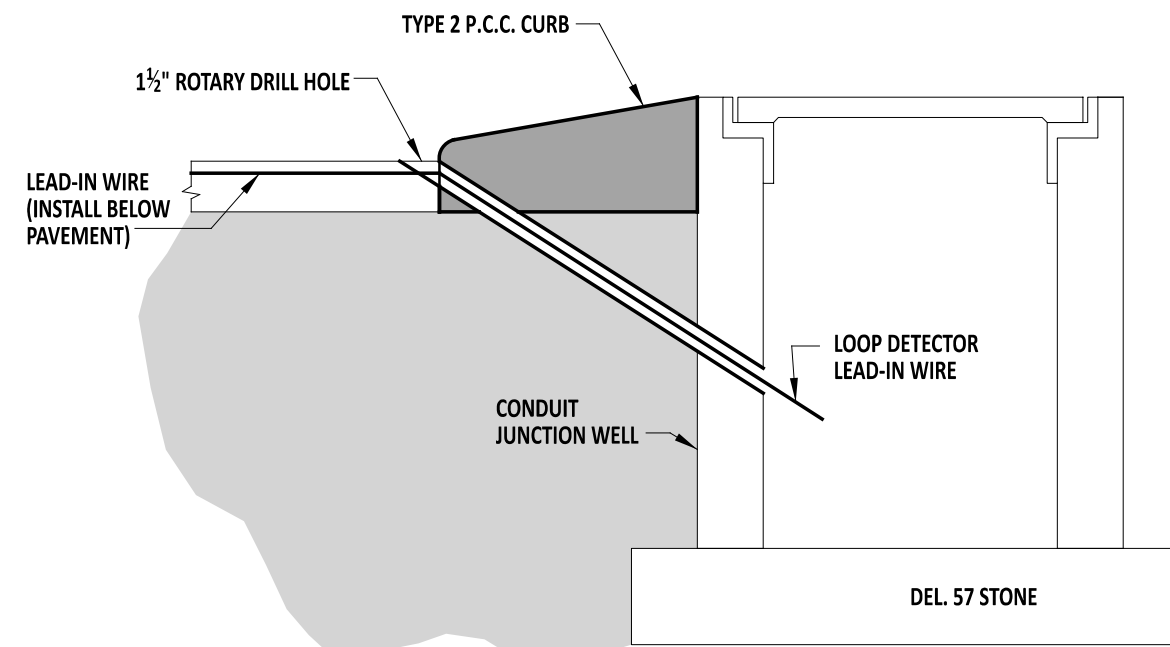

**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF 3 1/2" ON ALL SURFACES.
- 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 1/2".




 ENGINEERING SUPPORT DATE 09/01/2020
RECOMMENDED

**LOOP DETECTOR LEAD-IN WIRE INSTALLATION - JUNCTION WELL
BEHIND CURB OR CURB AND GUTTER WITH OR WITHOUT SIDEWALK**
 STANDARD NO. T-8 (2020) SHT. 2 OF 4

REVIEWED  DATE 09/01/2020
 DEPUTY DIRECTOR - DESIGN
 APPROVED  DATE 09/01/2020
 CHIEF ENGINEER