



WHERE LANE WIDTH ≤11' OR SHOULDER WIDTH ≤5'

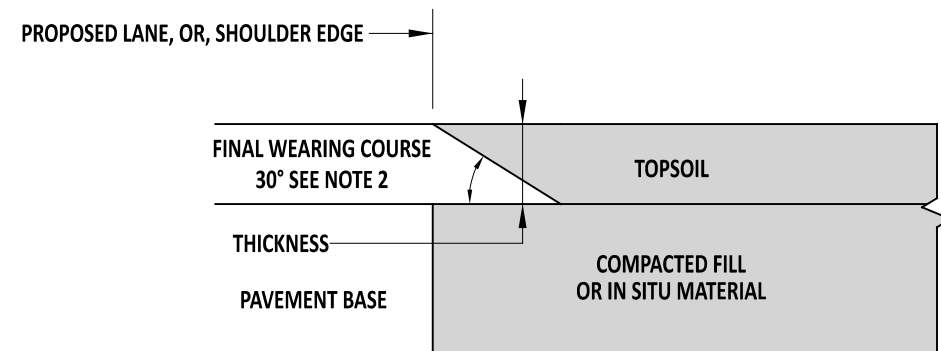

WHERE LANE WIDTH >11' OR SHOULDER WIDTH >5'

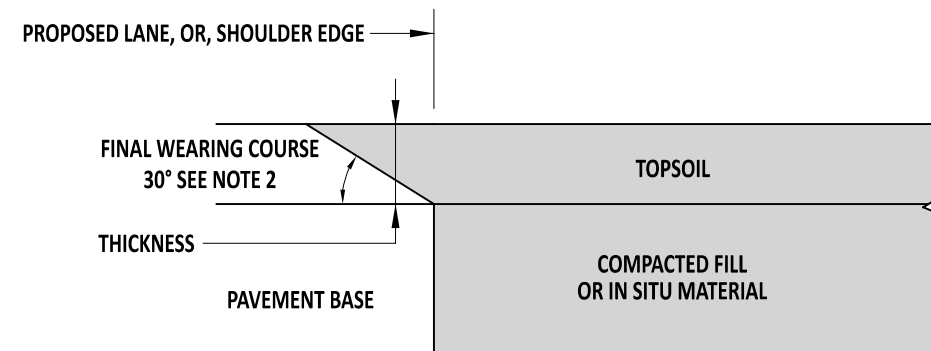

THICKNESS OF SAFETY EDGE	
CONCRETE PAVEMENT	3"
BITUMINOUS CONCRETE PAVEMENT FINAL WEARING COURSE	> 1¼"

NOTE:

- 1). LEVEL COMPACTED FILL OR IN-SITU MATERIAL WITH THE PAVEMENT BASE PRIOR TO FINAL BITUMINOUS CONCRETE PAVING LIFT.
- 2). ANGLE ALLOWANCE OF 26° MINIMUM TO 40° MAXIMUM.




 ENGINEERING SUPPORT 12/08/2021
 DATE
RECOMMENDED

PAVEMENT SAFETY EDGE

STANDARD NO. P-6 (2021) SHT. 1 OF 1

REVIEWED 
 DEPUTY DIRECTOR - DESIGN 12/08/2021
 DATE
 APPROVED 
 CHIEF ENGINEER 12/20/2021
 DATE