


**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**

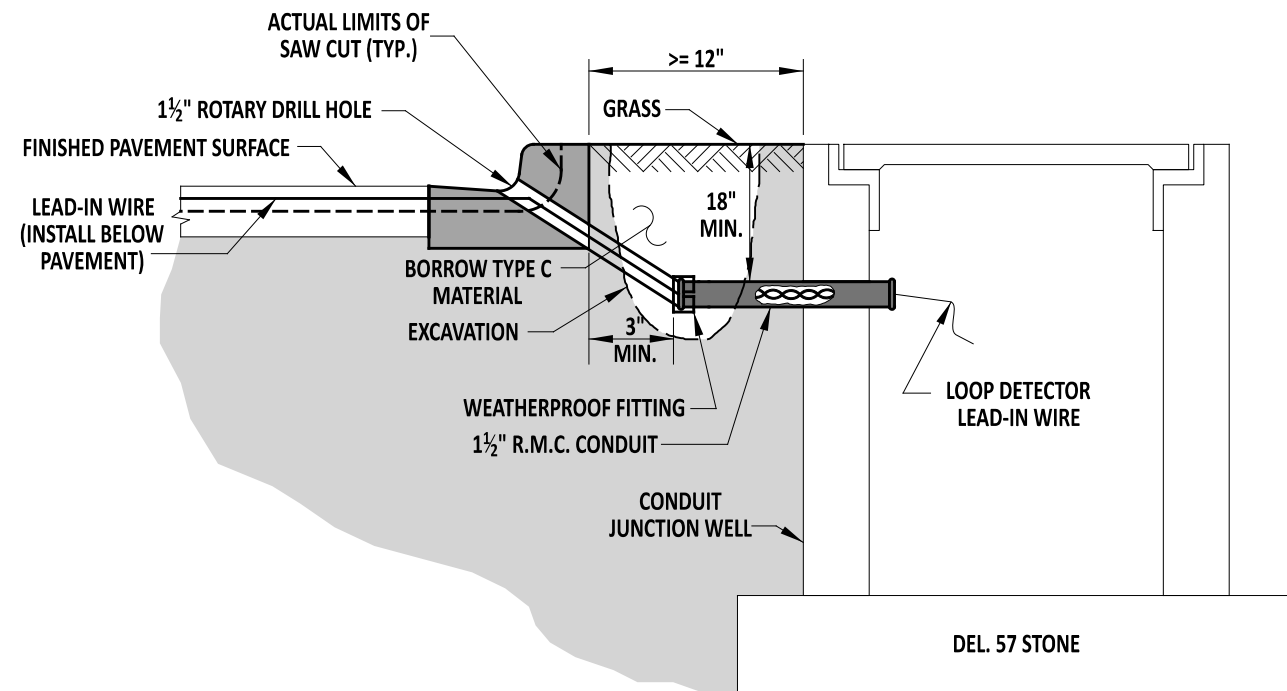

**LOOP DETECTOR
LEAD-IN WIRE INSTALLATION**

NOTES:

- 1). ALL SAWCUTS SHALL BE A DEPTH OF 3 1/2" ON ALL SURFACES.
- 2). CONTRACTOR SHALL INSTALL LEAD-IN WIRE IN THE MOST DIRECT ROUTE TO THE JUNCTION WELL USING THE CLOSEST CONCRETE CURB JOINT.
- 3). ALL SAWCUTS SHALL BE PATCHED WITH NON-SHRINK CONCRETE CAULK.
- 4). CONTRACTOR SHALL CORE AT FULL DEPTH OF SAWCUT, 3 1/2".
- 5). CONTRACTOR SHALL INSTALL DETECTABLE WARNING TAPE IN TRENCH FOR LEAD-IN CONDUIT.



John C.
ENGINEERING SUPPORT
RECOMMENDED
12/08/2021
DATE

LOOP DETECTOR LEAD-IN WIRE INSTALLATION -
JUNCTION WELL BEHIND CURB OR CURB AND GUTTER WITH GRASS STRIP
STANDARD NO. T-8 (2021) SHT. 1 OF 4

REVIEWED *Mike Lee*
DEPUTY DIRECTOR - DESIGN 12/08/2021
DATE
APPROVED *Shrey*
CHIEF ENGINEER 12/20/2021
DATE