


PLAN VIEW

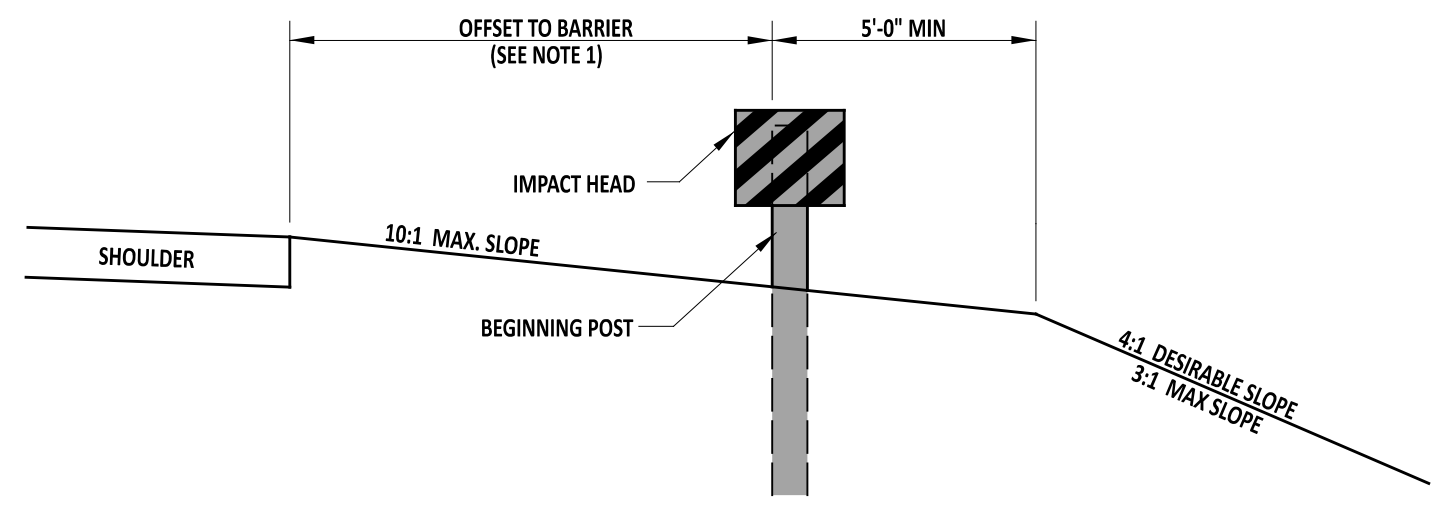

SECTION A-A

■ = NO OBSTRUCTIONS IN SHADED AREA

NOTES:

- 1). FLARE THE END TREATMENT AT 25:1 BEGINNING 50'-0" FROM THE END OF THE IMPACT HEAD, UNLESS THE CONSTRUCTION PLANS OR SPECIFICATIONS SPECIFY A SMALLER FLARE.
- 2). THIS DETAIL WAS SOLELY CREATED TO SHOW THE GRADING REQUIRED FOR THIS TYPE OF GUARDRAIL END TREATMENT AND IS APPLICABLE IN THE ABSENCE OF SPECIFIC GRADING REQUIREMENTS FROM THE GUARDRAIL END TREATMENT MANUFACTURER.
- 3). THE GUARDRAIL END TREATMENT SHALL BE INSTALLED AS PER THE MANUFACTURER'S REQUIREMENTS.
- 4). IF CURB IS PRESENT, DEPRESS THE CURB TO A MAXIMUM HEIGHT OF 2" WITHIN THE LIMITS OF THE END TREATMENT AND THROUGHOUT THE LENGTH OF THE TAPER GRADING.
- 5.) GUARDRAIL REFLECTORS SHALL NOT BE PLACED WITHIN THE LIMITS OF THE GUARDRAIL END TREATMENT.



John C. [Signature]
 ENGINEERING SUPPORT
 RECOMMENDED
 DATE: 12/08/2021

GRADING FOR GUARDRAIL END TREATMENT ATTENUATOR, TYPE 1
 STANDARD NO. **B-2 (2021)**
 SHT. 1 OF 3

REVIEWED *[Signature]* 12/08/2021
 DEPUTY DIRECTOR - DESIGN
 APPROVED *[Signature]* 12/20/2021
 CHIEF ENGINEER