
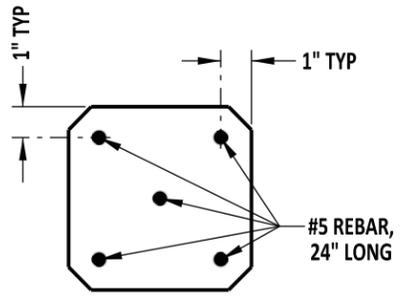




SCALE : NTS

- NOTES : 1). LONGITUDINAL STEEL SHALL BE HELD IN PLACE BY CRADLES.
 2). LETTERS ON CONCRETE MONUMENT TO BE COUNTERSUNK IN TOP OF MARKER 1/4".
 3). FLEXIBLE DELINEATORS ARE ONLY TO BE USED ON ROADS WITH A SPECIFIED DENIAL OF ACCESS OR CLASSIFIED AS MINOR ARTERIALS OR HIGHER. ON ALL OTHER ROAD CLASSIFICATIONS, A WOODEN STAKE SHALL BE PLACED WITH "ROW" HANDWRITTEN VERTICALLY IN 1" TALL LETTERS.
 4). PLACE CAP ON CONCRETE MONUMENT SO THAT TOP OF CAP IS FLUSH WITH THE TOP OF THE CONCRETE MONUMENT.

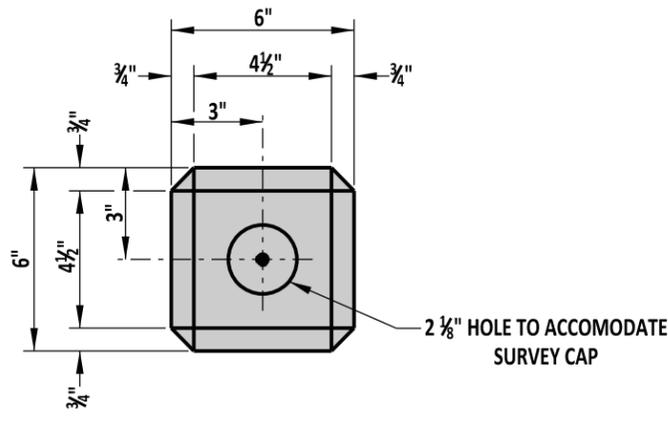


SECTION A-A


TOP

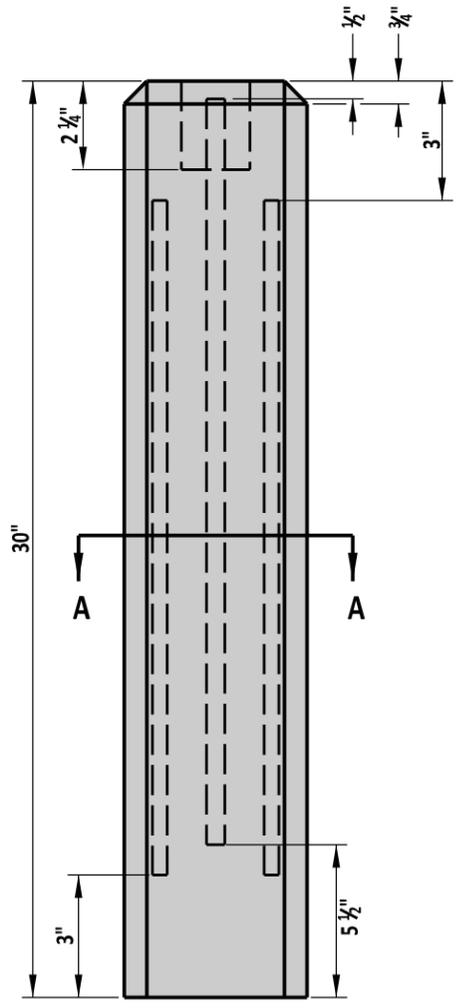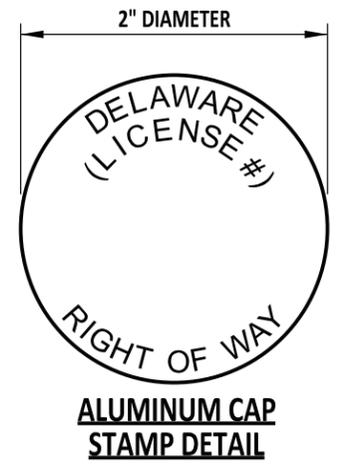

ELEVATION

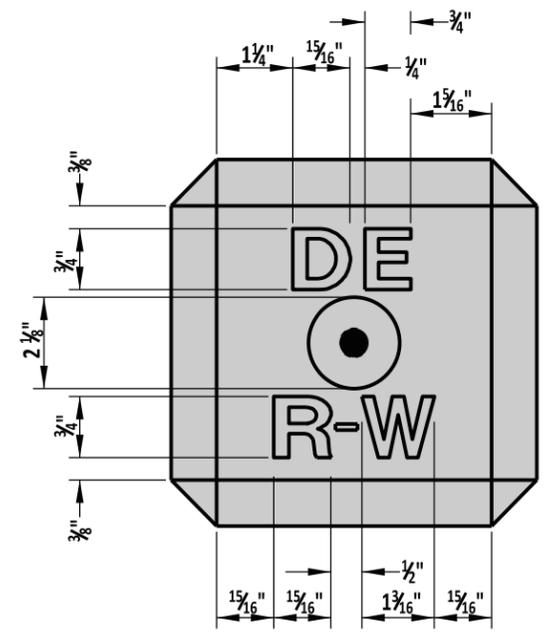

TOP DETAIL

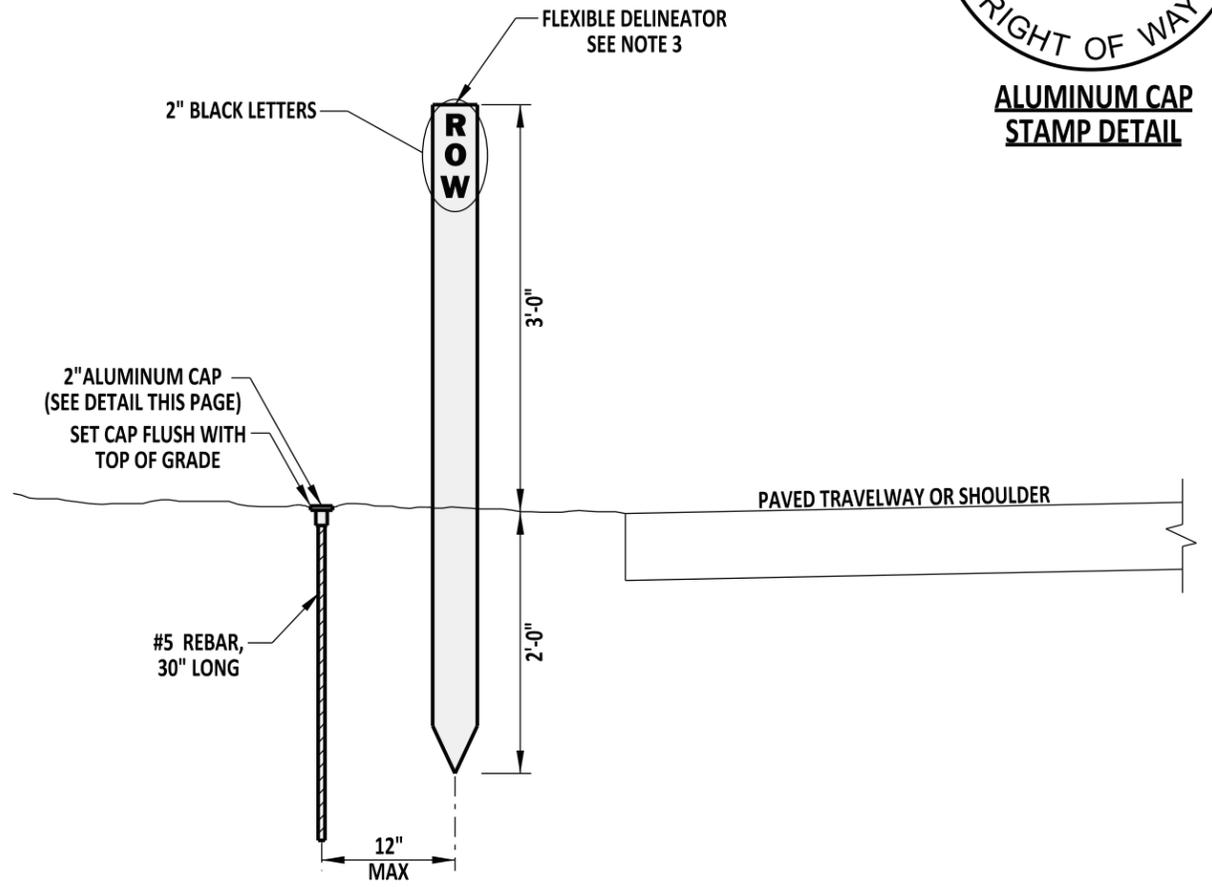

REBAR AND CAP WITH FLEXIBLE DELINEATOR DETAIL



RIGHT OF WAY MONUMENTATION				APPROVED	SIGNATURE ON FILE <small>CHIEF ENGINEER</small>	12/22/2011 <small>DATE</small>
STANDARD NO.	M-2 (2011)	SHT. 1	OF 1	RECOMMENDED	SIGNATURE ON FILE <small>DESIGN ENGINEER</small>	12/21/2011 <small>DATE</small>