


DRAINAGE PIPE SCHEDULE						
NO.	SIZE / TYPE	CLASS	LENGTH	SLOPE	INT. EL.	DIS. EL.
1	18" H. D. P. E.	S	20.00	5.00%	24.50	23.50

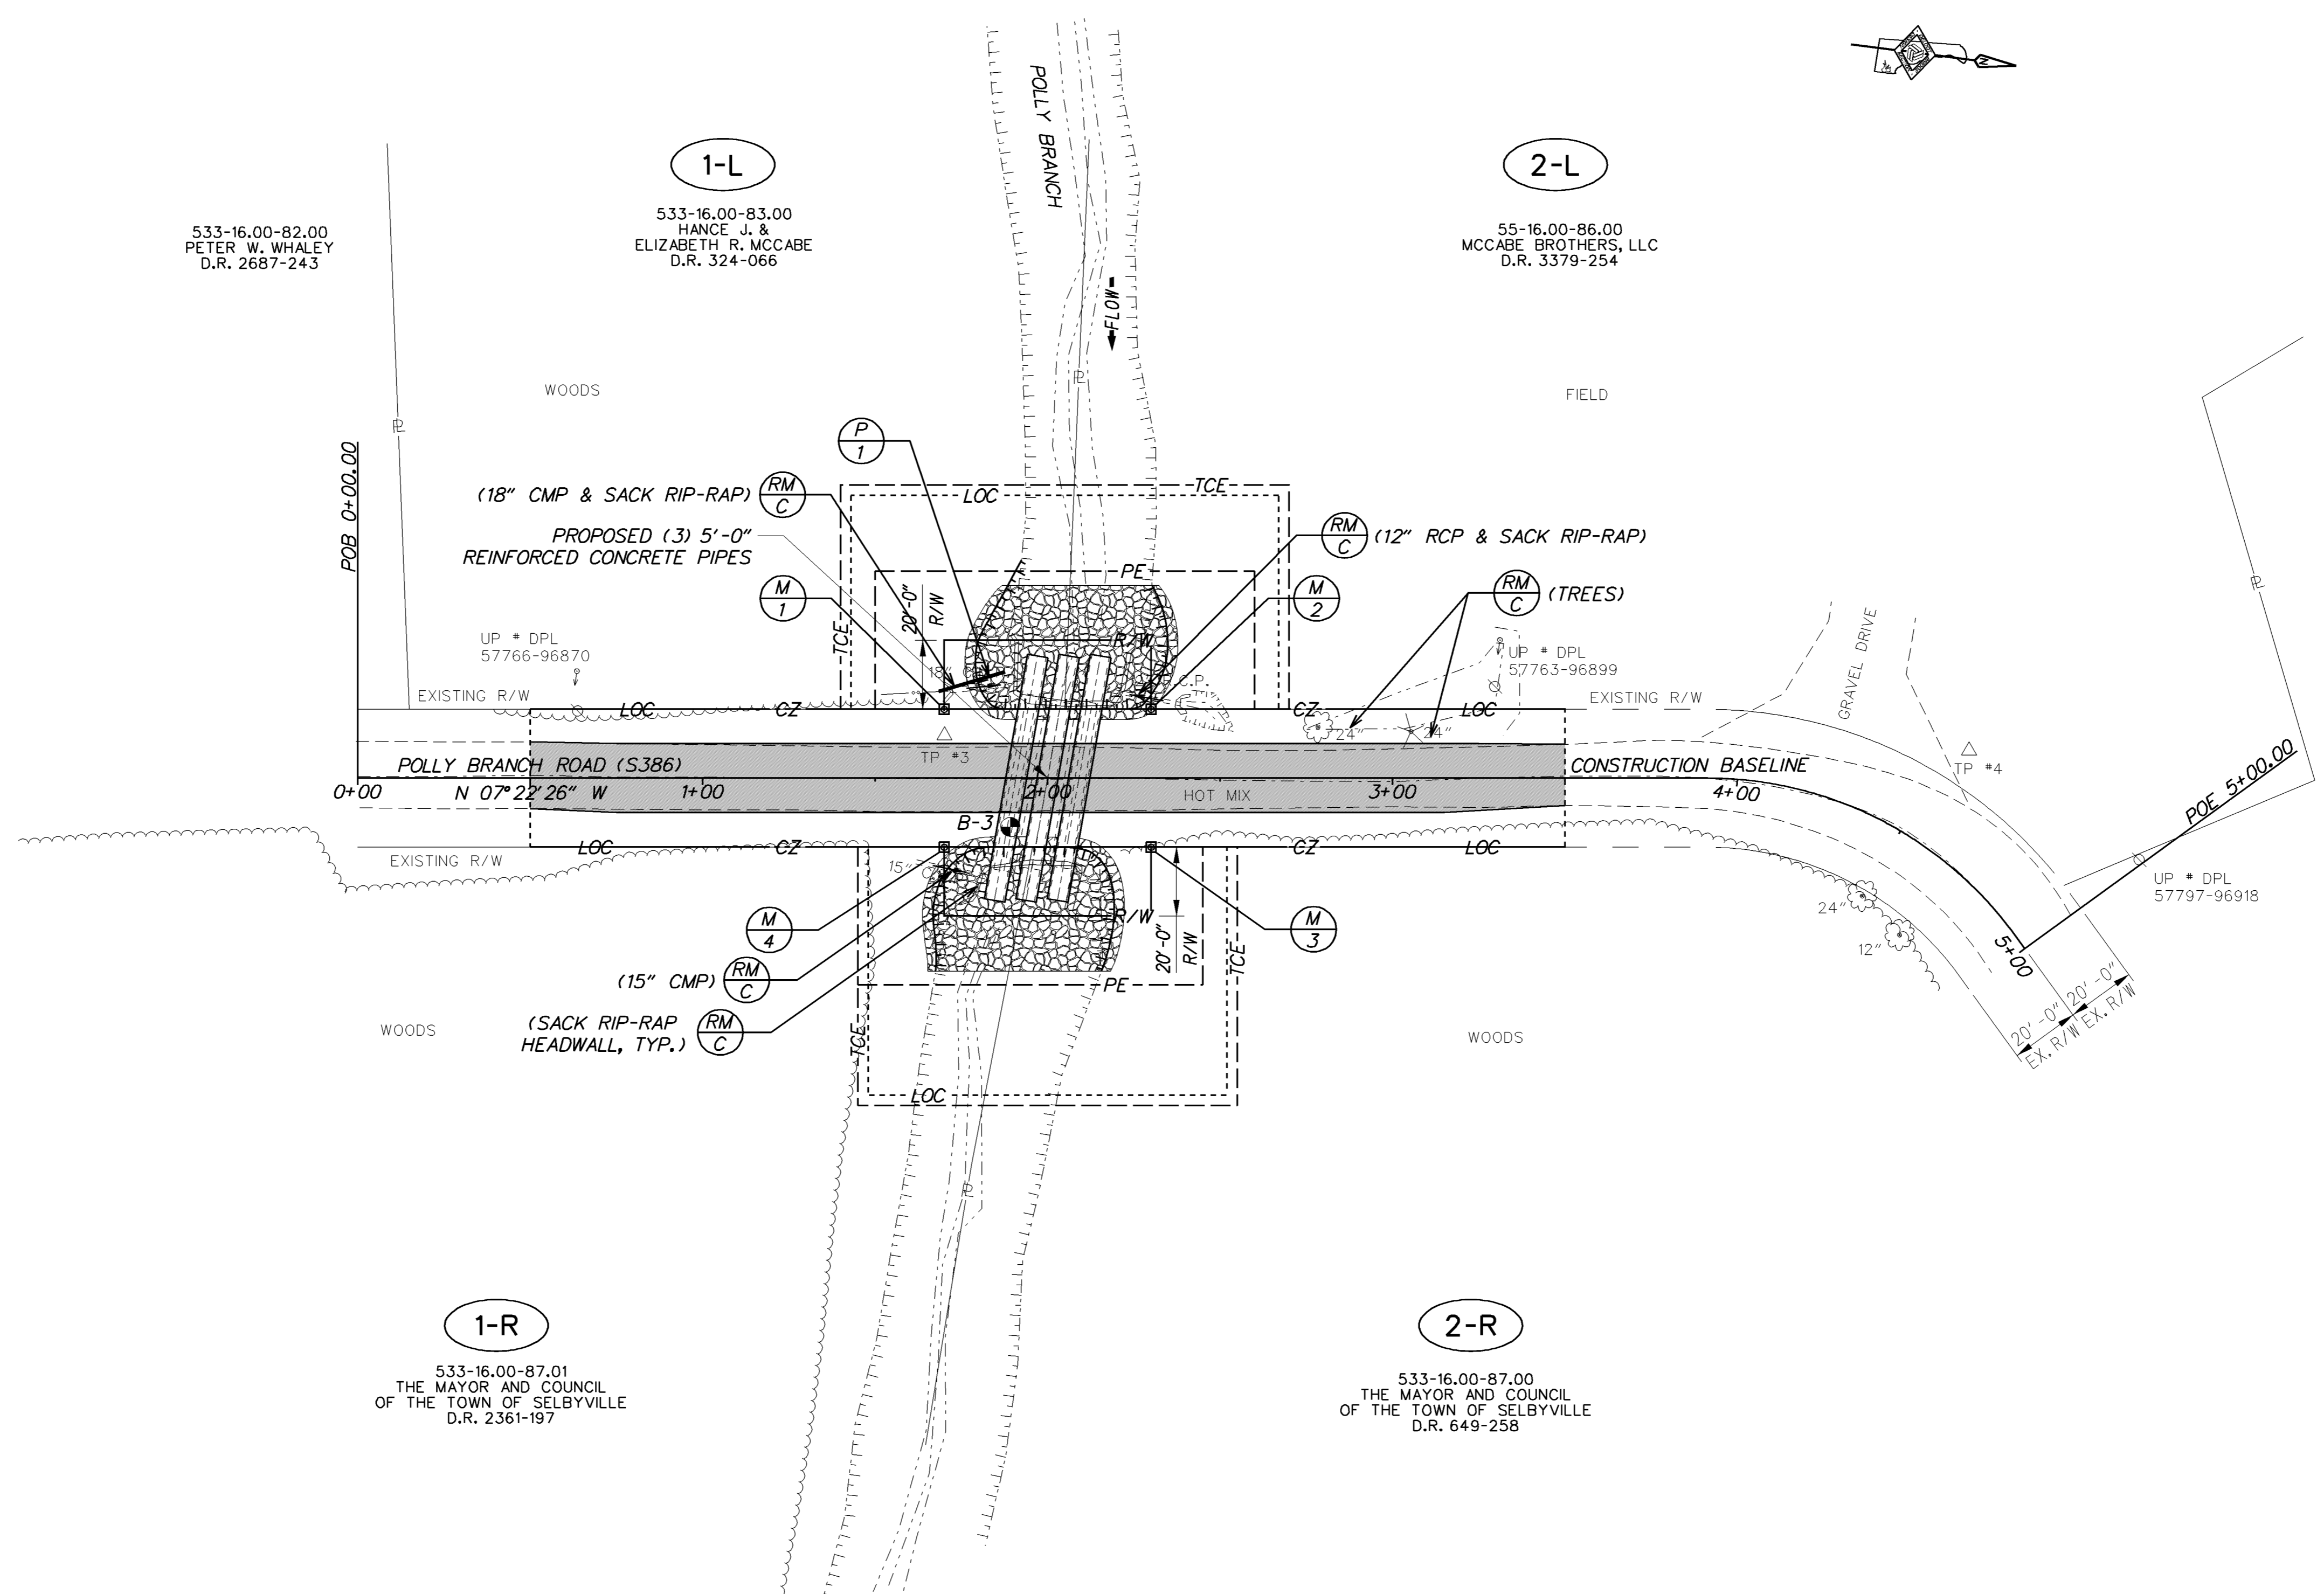


RIGHT-OF-WAY MONUMENT SCHEDULE					
NO.	TYPE	STATION	OFFSET	NORTHING	EASTING
M-1	CAPPED REBAR	1+70.00	-20.00	171015.97	712789.94
M-2	CAPPED REBAR	2+30.00	-20.00	171075.47	712782.24
M-3	CAPPED REBAR	1+70.00	20.00	171021.10	712829.61
M-4	CAPPED REBAR	2+30.00	20.00	171080.60	712821.91

SOIL BORING SCHEDULE					
NO.	STATION	ELEVATION	OFFSET	NORTHING	EASTING
B-3	1+89.21	28.52	14.14	171039.40	712821.33

Y:\SUSSEX\404\BRIDGE\T20107604\PLANS\CP-3-409-NEW.DGN



ADDENDUMS / REVISIONS	

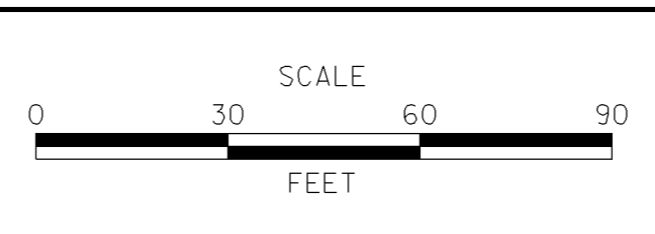

SUSSEX COUNTY PIPE REPLACEMENTS, FEDERAL, 2012

CONTRACT	BRIDGE NO.	3-409
T20107604	DESIGNED BY:	SMW
COUNTY	CHECKED BY:	EM
SUSSEX		

CONSTRUCTION PLAN

SHEET NO.	30
TOTAL SHTS.	68