



DRAINAGE INLET SCHEDULE						
NO.	STATION	OFFSET	BOX SIZE	GRATE	T.G. EL.	INV. EL.
1	4+88	20.50	34" x 18"	A	37.11	35.11

DRAINAGE PIPE SCHEDULE						
NO.	SIZE / TYPE	CLASS	LENGTH	SLOPE	INT. EL.	DIS. EL.
1	15" RCP	111	26'	0.75%	36.55	36.35
2	15" RCP	111	150'	2.23%	35.11	34.40

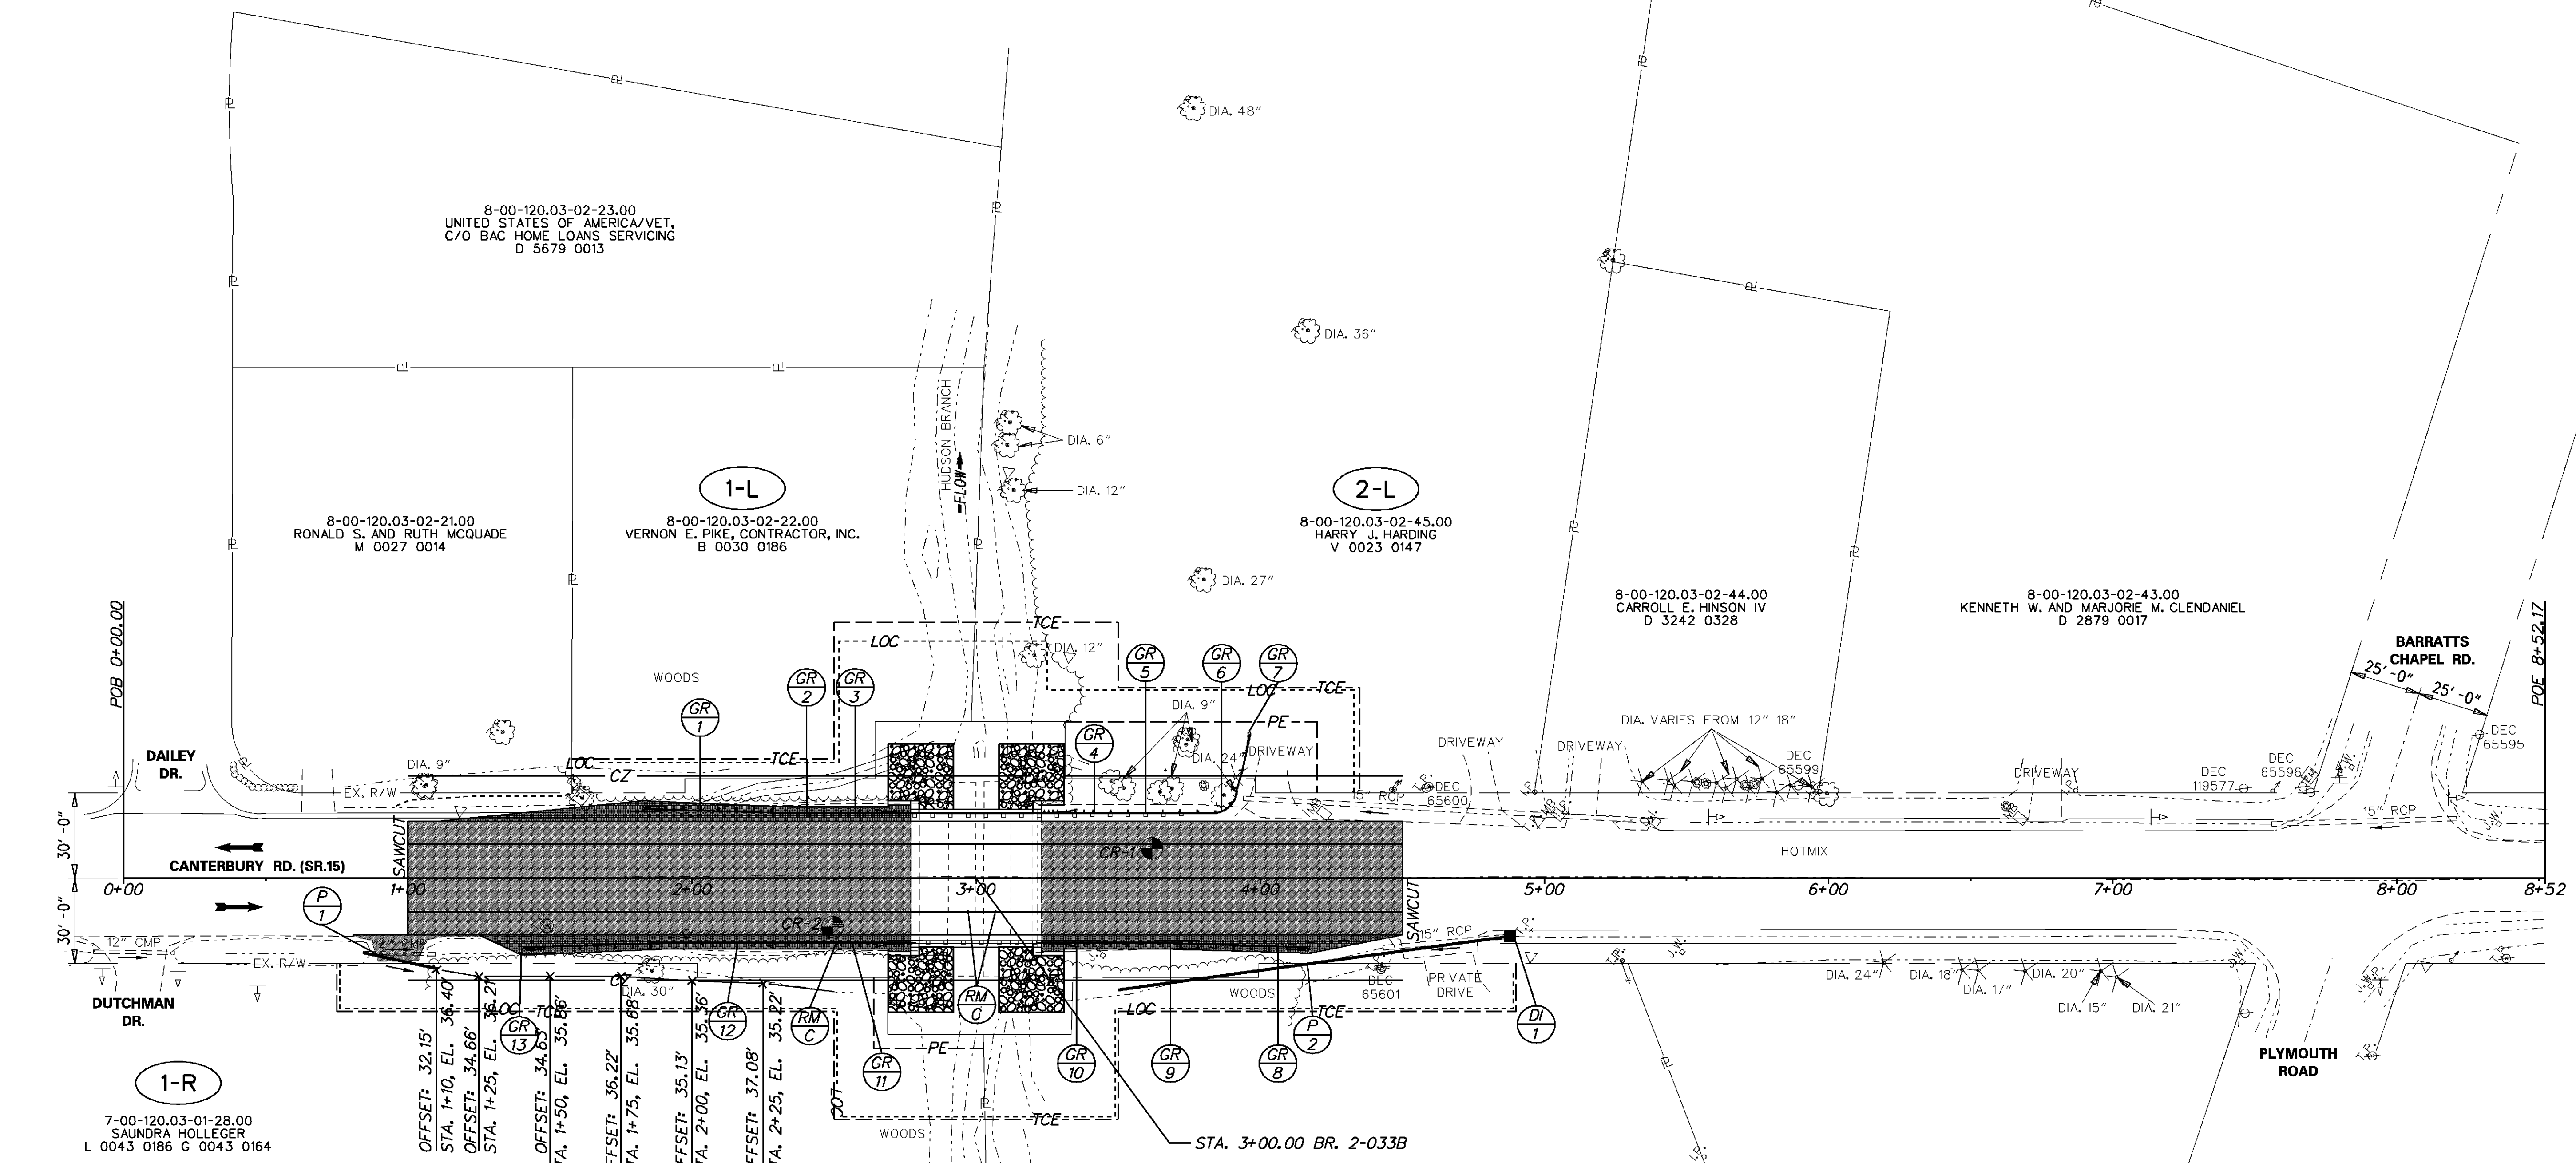


GUARDRAIL SCHEDULE				
NO.	ITEM DESCRIPTION / TYPE	BEGIN STA.	OFFSET	LENGTH
GR-1	GUARDRAIL END TREATMENT ATTENUATOR/1	2+34.33	-23.0000	**
GR-2	GUARDRAIL / 1-31	2+52.56	-23.0000	18.7500'
GR-3	GUARDRAIL TO BARRIER, APPROACH / 2-31	2+79.50	-23.0000	**
GR-4	GUARDRAIL TO BARRIER, APPROACH / 2-31	3+21.50	-23.0000	**
GR-5	GUARDRAIL / 1-31	3+47.44	-23.0000	25.0000'
GR-6	1 - CURVED GUARDRAIL (8' - 6" RADIUS)	3+71.77	-23.0000	**
GR-7	1 - END ANCHORAGE	3+71.77	-37.7900	**
GR-8	GUARDRAIL END TREATMENT ATTENUATOR/1	3+65.72	23.0000	**
GR-9	GUARDRAIL / 1-31	3+47.44	23.0000	25.0000'
GR-10	GUARDRAIL TO BARRIER, APPROACH / 2-31	3+21.50	23.0000	**
GR-11	GUARDRAIL TO BARRIER, APPROACH / 2-31	2+79.50	23.0000	**
GR-12	GUARDRAIL / 1-31	2+52.56	23.0000	62.5000'
GR-13	GUARDRAIL END TREATMENT ATTENUATOR/1	1+91.73	23.0000	**

** SEE DELDOT STANDARD CONSTRUCTION DETAILS FOR LENGTHS

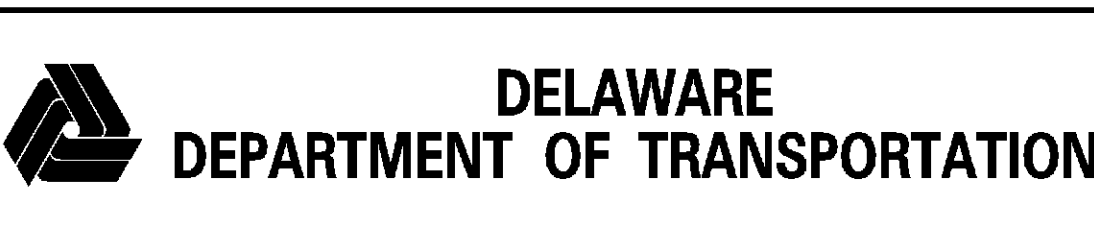

ADDENDUMS / REVISIONS	

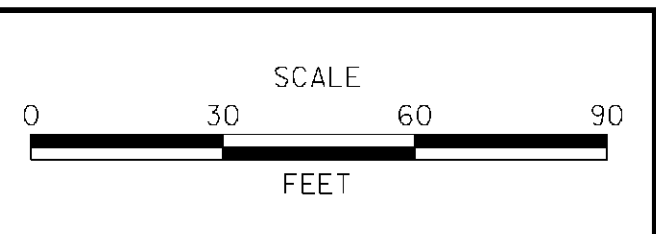

BR. 2-033B ON SR 15, CANTERBURY ROAD OVER HUDSON BRANCH

CONTRACT	BRIDGE NO.	2-033B
T201107202	DESIGNED BY:	NC
COUNTY	CHECKED BY:	JM
KENT		

CONSTRUCTION PLAN

SHEET NO.	5
TOTAL SHTS.	21

Y:\KENT\033\BRIDGE\T201107202\PLANS\CP.DGN