


SECTION A-A



PLAN VIEW

- NOTES:**
- 1). TYPE 11 CONDUIT JUNCTION WELL LID SHALL BE PRECAST POLYMER CONCRETE WITH A HEAVY-WEAVE FIBERGLASS FRAME. INSTALLED ON A PRECAST CONCRETE WELL.
 - 2). TYPE 11 CONDUIT JUNCTION WELL BODY SHALL BE PRECAST CONCRETE. AT LEAST ONE HOLE IN PRECAST WELLS WILL BE OF A 5" DIAMETER COMPLETELY THROUGH THE WALL. UNUSED HOLES SHALL BE PLUGGED.
 - 3). TYPE 11 CONDUIT JUNCTION WELLS SHALL BE CONSTRUCTED FLUSH WITH THE SURFACE OF THE SAME. INSTALLATION IN UNPAVED AREAS WILL BE CONSTRUCTED ABOVE GRADE AND GRADED TO DRAIN AWAY FROM THE CONDUIT JUNCTION WELL.
 - 4). ALL CRACKS, GAPS, OR OPENING IN JUNCTION WELL WALL SHALL BE SEALED WITH CONCRETE.

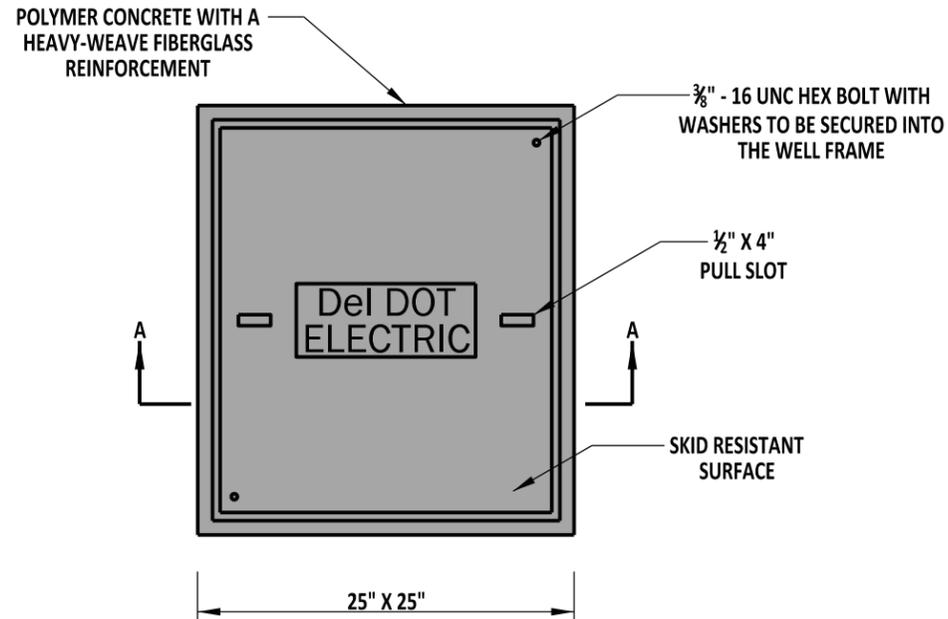

DELAWARE
DEPARTMENT OF TRANSPORTATION

CONDUIT JUNCTION WELL, TYPE 11			
STANDARD NO.	T-3 (2012)	SHT.	1 OF 3

APPROVED	SIGNATURE ON FILE <small>CHIEF ENGINEER</small>	01/07/2013 <small>DATE</small>
RECOMMENDED	SIGNATURE ON FILE <small>DESIGN ENGINEER</small>	12/20/2012 <small>DATE</small>