



PLAN

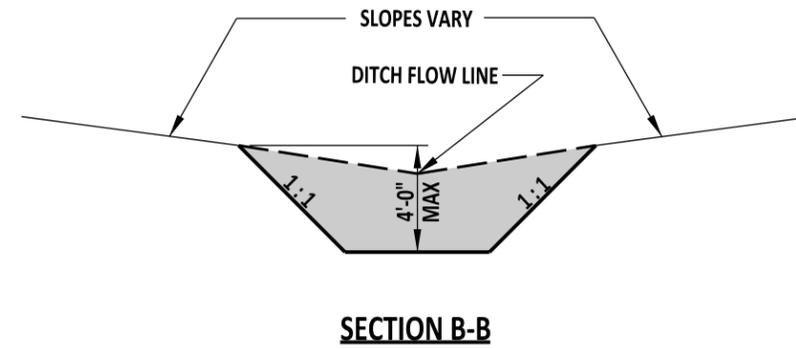

SECTION B-B

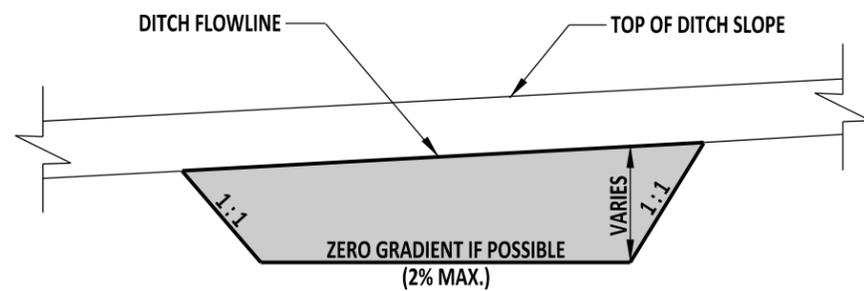

SECTION A-A

NOTES:

- 1). SEDIMENT TRAPS ARE INTENDED FOR USE IN EXISTING, PROPOSED, AND TEMPORARY DITCHES OF ALL TYPES WITH A MAXIMUM DRAINAGE AREA OF 15 ACRES, AS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.
- 2). STABILIZE SIDE SLOPES WITH TEMPORARY GRASS SEEDING AS PER SPECIFICATIONS.
- 3). AN OUTLET STRUCTURE IS REQUIRED AND IS NOTED ON THE PLANS.
- 4). FOR SIZE, LOCATION, ETC. OF SEDIMENT TRAP, SEE PLANS.
- 5). ALL FILL SLOPES ARE TO HAVE A SLOPE OF 2:1.
- 6). THE SEDIMENT TRAP LENGTH TO WIDTH RATIO IS TO BE 2:1. SPECIAL DESIGNS ARE PERMITTED TO INCREASE THE FLOW TIME AFTER APPROVAL BY THE STORMWATER ENGINEER.



DELAWARE
DEPARTMENT OF TRANSPORTATION

SEDIMENT TRAP				APPROVED	SIGNATURE ON FILE <small>CHIEF ENGINEER</small>	12/30/2014 <small>DATE</small>
STANDARD NO.	E-3 (2014)	SHT.	1 OF 1	RECOMMENDED	SIGNATURE ON FILE <small>DESIGN ENGINEER</small>	12/11/2014 <small>DATE</small>